

item number	thickness of metal sheet (mm)	H (mm)	A (mm)	weight (kg/pc)	min. amount of bolts for connection	🔥
<b>INOXSK 50_IX</b>	1	43	200	0,09	2	🔥
<b>INOXSK 100_IX</b>	1	93	214	0,21	4	🔥

**product description:** The hinged joint is used to create bends of any angle in cable trays running through cable trays.

The coupling is supplied by 1 piece; must be used 2 pieces for installation. The couplings to be used on the right or left side do not differ.

The connection is performed using the bolts NIXSM 6X10.

To protect the cables, the bolt head is inside the cable ladder.

**material:** IX - stainless steel AISI 304  
(AISI 316, AISI 316L only to order)



**sales amount:** á 1 pc

**meets the requirements:** ČSN EN 61537

**classification 🔥:** ČSN 73 0895 P 90-R  
DIN 4102-12 E 90  
STN 92 0205 PS 90

Fire classification is depend on the specific conditions of the cable tray, detailed in the catalog Systems with maintained functionality in fire

**storage:** ČSN EN 60721-3-1

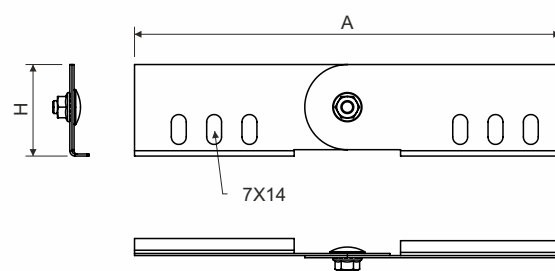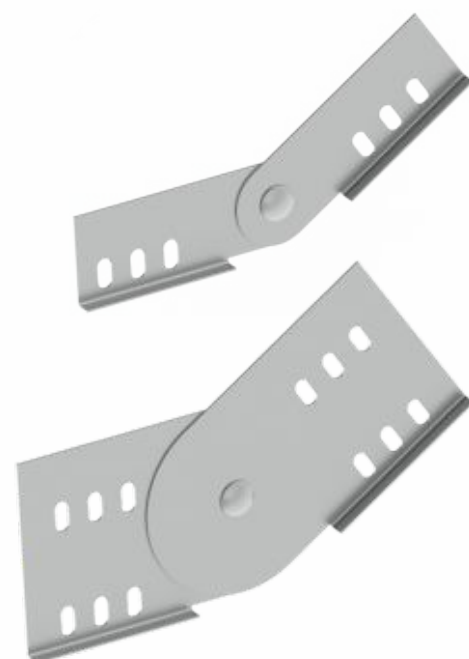



**WARNING****Risk of injury from cutting**

Although the cable trays are produced with maximum effort to minimize sharper edges, it is necessary to wear protective gloves to carry, grip and work with cable elements.

**Electricity injury**

As individual components of cable management systems are made of electrical conductive material, it is essential not to work with a system near live electrical parts. Infringement of the safety regulations may cause serious injury of health or death.

**Safe Use**

Under normal and foreseeable conditions of use, there are no risks to consumers, provided that proper installation and usage are carried out in accordance with the installation manual.

recycling codes:



INOXSK