

item number	width of cable ladder (A)
INOXKL 60X200_IX	200
INOXKL 60X300_IX	300
INOXKL 60X400_IX	400

height of cable ladder: 60 mm

length of cable ladder: 2100 mm

distance of rungs: 300 mm

metal sheet thickness: 1,2 mm

product description: Cable ladder is designed to create a cable route. It allows you to create horizontal, vertical and inclined routes.

The cable ladder consists of sidewalls and rungs, this design allows better cooling of cables.

Perforated sidewalls create the L-profile with a bended tag. Perforated rungs of the C-profile are attached to the sidewalls by riveting through in the distance of 300 mm with the open side of the profile upwards.


Connection of ladders is carried out using couplings INOXS 60 (2 pcs) and using min. 8 pieces of screws NIXSM 6X10.

material: IX - stainless steel AISI 304
(AISI 316, AISI 316L only to order)

sales amount: 2,1 m

meets the requirements: ČSN EN 61537

storage: ČSN EN 60721-3-1

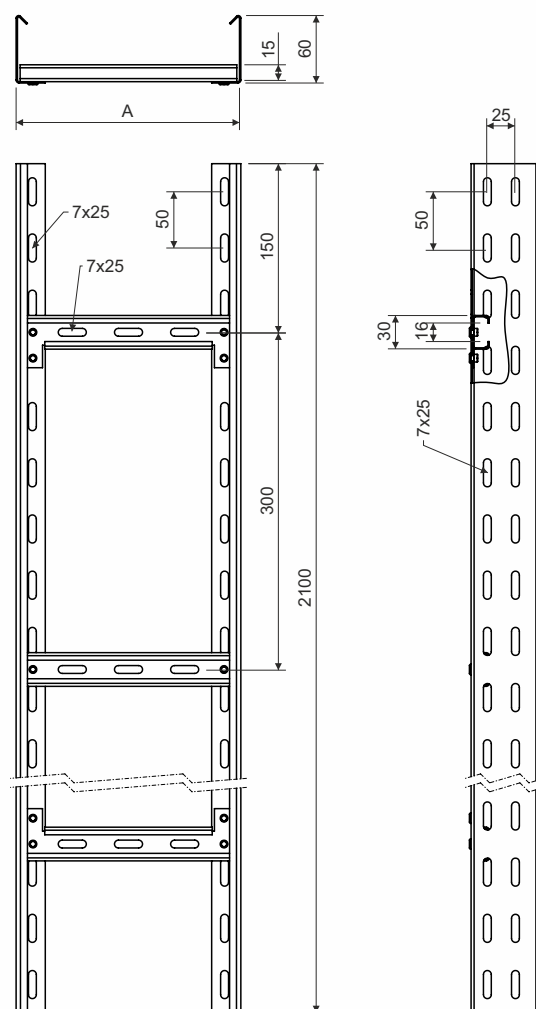

 WARNING**Risk of injury from cutting**

Although the cable trays are produced with maximum effort to minimize sharper edges, it is necessary to wear protective gloves to carry, grip and work with cable elements.

Electricity injury

As individual components of cable management systems are made of electrical conductive material, it is essential not to work with a system near live electrical parts. Infringement of the safety regulations may cause serious injury of health or death.

Safe Use

Under normal and foreseeable conditions of use, there are no risks to consumers, provided that proper installation and usage are carried out in accordance with the installation manual.

recycling codes:

**INOXKL**