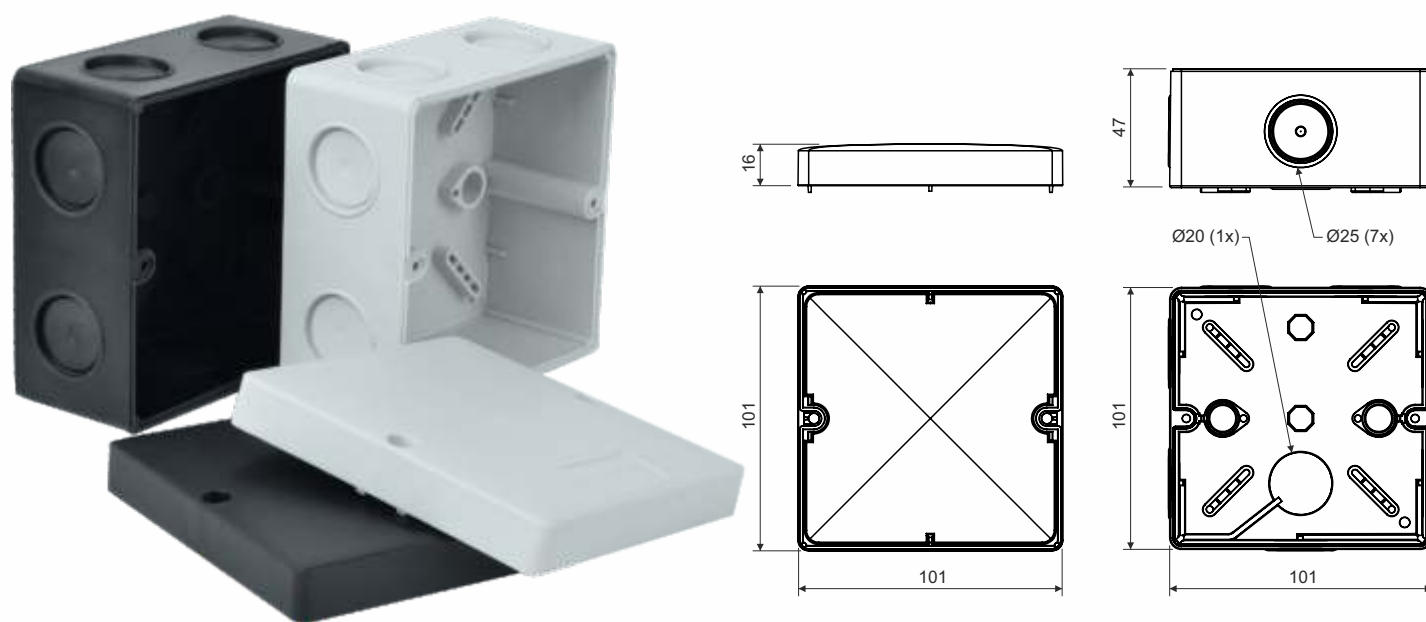



product description:

designed for distribution system with voltage 1000 V
 intended for installation in environments that require IP 66 protection
 made from UV-resistant material
 integrated knockouts for mounting on base
 perfect sealing of cables and pipes
 integrated O-ring to install cable glands
 intended for direct installation on the surface without having to support with insulating pad
 stainless steel screws for lid installation
 the option to install special terminal block S-KSK 1
 7x inlets with Ø25 mm and 1x Ø20 mm
 for boxes located in environments with possible temperature changes, it is recommended to drill pre-marked holes in the bottom for condensate drainage

material - box: PP (halogen-free, Pb-free material)

material - cover: PA (halogen-free, Pb-free material)

self-snuffing: yes, within 30 s

temperature resistance: -25 - +60 °C

flaming loop test: 850 °C

fire class for underlying material: A1-F

protection types: IP 66

weight: 147 g

meets the requirements: ČSN EN 60670-1, ČSN EN IEC 60670-1 ed. 2:21

storage: ČSN 64 0090

KSK 100_KA - light gray RAL 7035, plugs and lid screws inserted in the box, each box packed in shrink foil and labelled; 30 pcs boxes in cardboard

KSK 100_KA - black, plugs and lid screws inserted in the box, each box packed in shrink foil and labelled; 30 pcs boxes in cardboard

accessories:

terminal plate S-66

terminal plate S-KSK-1

screwless terminal plates TYP015, TYP016, TYP017, TYP018